


• **VB-FullAir-2C**
Technical specifications



Volkswagen Crafter 5,0t

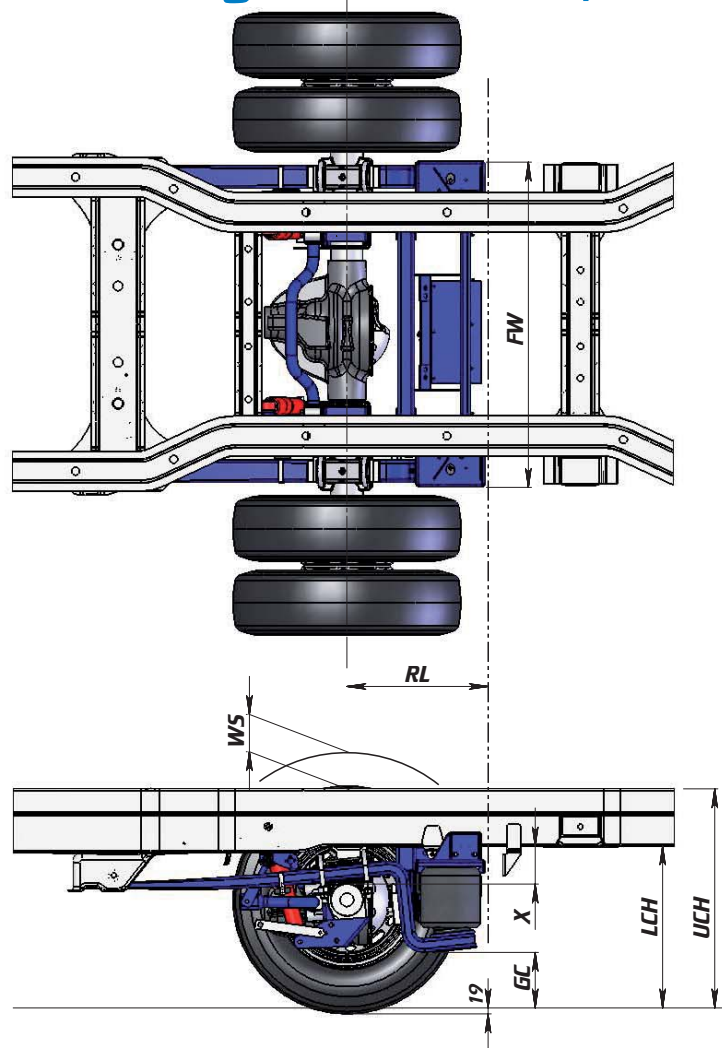

Description*	Min. height	Ride-height	Max. height	Min. height	Ride-height	Max. height
Rear axle type	Standard		+ 25mm Rideheight			
Lower chassis height (LCH)	440	500	525	440	525	560
Upper chassis height (UCH)	620	680	705	620	705	740
Ground clearance (GC)	136	119	110	145	120	100
X-value (X) **	60	120	145	60	145	180
Rear length (RL)	440					
Frame width (FW)	770					
Wheel space (WS)	120					

* All the measurements are in mm, measured above the centre-line of the rear axle on a standard chassis, with tyre size 195/75R16 and a rear axle-load of 3000kg. Therefore a tyre compression of 19mm is included.

Volkswagen Crafter 5,0t

Technical specifications

Air-suspension system

Suspension system contains mainsprings (trailing arms) with air-springs, shock absorbers and a stabiliser bar. The system has a dual-air-circuit with twin height sensors.

The electronics of the air suspension is tested according to EMC (European directives for electronics) directive 72/245/EEC last amended, 2006/28/EC.

The air-suspension can be controlled by the supplied remote control. There are different options for this: VB-SRC (Standard Remote Control) or a simple control unit. It's even possible to control the system through the electrical system or CAN-bus system of the body builder. For more information, contact VB-Airsuspension.

Weights

The weight change of the vehicle after switching to air-suspension depends of the kind of leaf springs removed.

For leaf spring 2E0 511 131 B: +42kg

Raise- and lowertimes

The raise and lower times depends on the load of the vehicle. The measured values are measured by a rear axle load of 3000kg.

Raise time lowest position > ride height: 34 sec
Raise time ride height > highest position: 62 sec
Lower time highest position > ride height: 16 sec
Lower time ride height > lowest position: 14 sec

Compressor

Contains an air dryer, thermal circuit breaker and a pressure protection valve.

Operating voltage: 12V
Nominal current: 26A
Starting current: $\leq 120A$ over $t \leq 100ms$
Degree of protection : IP68
Maximum pressure: 10-13 bar

Air-spring

VB-TS (Tapered Sleeve) with double polyamide cord ply and extra low resistance and hysteresis. This air-spring is specially developed for use with light commercial vehicles.

Shock absorber

Adjustable, double-acting shock absorber.

Options

- Emergency valve kit 2C
- Rear-door switch kit
- Extra-time module
- VB-AOWS (Axle Overloading Warning System)

Notes

For the fitting of the air-suspension kit, the factory options UF3 and 0BD are required.

When the vehicle doesn't have the option 0BD (heavy stabiliser), there has to be an extra stabiliser bracket kit ordered by VB-Airsuspension (VB-article no.: 1052350021).

For vehicles with a wheelbase of 3665mm, the spare wheel bracket has to be modified. The original bracket on the chassis has to be removed and the spare wheel bracket is refitted to the upper crossbeam of the air-suspension. Another option is to order the following factory options: 1BO / 1GO / 1G8.

The WS measure does not reckon with the fitment of snow chains.

By fitting the air-suspension kit, the maximum GVW or the maximum axle load is not altered.

This air-suspension kit is also available with electronics for external air-supply or with an increased driving height. For more information, please contact VB-Airsuspension.

The measured weights are approximately determined.